



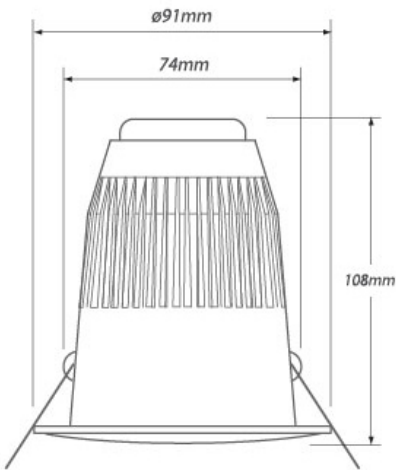

A brand of
MATRIX
LIGHTING

POLAR CURVE:

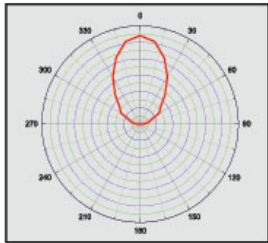

WWW.VIRIBRIGHT.COM



LED Downlight

VIRIBRIGHT™ LED Downlight is a direct replacement for 50-60W halogen and 9-13W CFL downlight and provides up to 85% energy savings over halogen. With long life, low energy consumption, no hazardous mercury, VIRIBRIGHT™ LED Downlight is setting the benchmark for price and performance.

General Specifications

Base Type	AC Terminal	
Color Temperature (K)	2800 / 4000 / 6000	
Lumen (Lm)	2800K	550
	4000K	700
	6000K	700
CRI	>80	
Beam Angle (°)	80°	
Lifespan	Up to 25,000 hrs	
Certification	Pending CE & UL	

Electrical Characteristics

Wattage	8W
Voltage	110-120V AC / 220-240V AC
Working Frequency (Hz)	50-60
Power Factor	0.9
Operating Temperature (°)C	-20° to 45°
Storage Temperature (°)C	-40° to 85°



NEW



Dimmer Switch PAR16 4.5W Spotlight 7W Spotlight Candle Bulb **Downlight** 10W LED Bulb 8W LED Bulb 5W LED Bulb PLC Lamp PAR 30 PAR 38 TB LED Tubes

GU10 MR16 E26 E27 E12 E14 B22 G24D-2P GU24 G13 (SSP) G13 (SW)