





A brand of

MATRIX
LIGHTING

POLAR CURVE:



PAR38

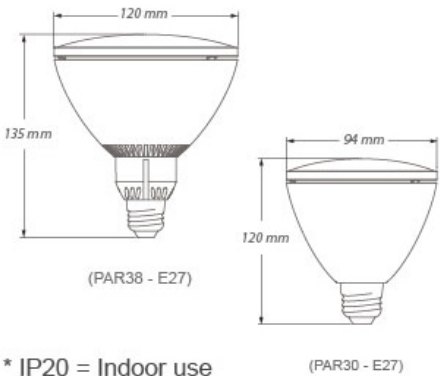

- * IP20 = Indoor use
- * IP55 = Outdoor use



Dimmable

CE cULus KEMA KEUR RINA
WWW.VIRIBRIGHT.COM



LED PAR Lamps

VIRIBRIGHT™ LED PAR lamps are a direct replacement for 60-100W incandescent and 13-25W CFL bulbs and provides up to 85% energy savings over incandescent. With long life, low energy consumption, no hazardous mercury, VIRIBRIGHT™ LED PAR lamps are setting the benchmark for price and performance.

| General Specifications | PAR38 | PAR30 | PAR16 | | |
|------------------------|------------------------|--------------------|--------------------------------------|--------------------|-----|
| Base Type | IP20 | IP55 | | | |
| | E26 / E27 / GU24 / B22 | | E26 / E27 / E14 / B22 GU10 / MR16 | | |
| Color Temperature (K) | 2800 / 4000 / 6000 | | | | |
| Lumen (Lm) | 2800K | 1100 | 1300 | 800 | 200 |
| | 4000K | 1400 | 1500 | 950 | 220 |
| | 6000K | 1400 | 1500 | 950 | 220 |
| CRI | >80 | | | | |
| Beam Angle (°) | 90° | 90° | 90° | 140° | |
| Lifespan | Up to 25,000 hrs | | | | |
| Certification | CE / UL | Pending CE / UL | Pending CE / UL | Pending CE / UL | |

Electrical Characteristics

| | |
|----------------------------|---------------------------|
| Wattage | 18W / 10W / 4.5W |
| Voltage | 110-120V AC / 220-240V AC |
| Working Frequency (Hz) | 50-60 |
| Power Factor | >0.9 |
| Operating Temperature (°C) | -20° to 45° |
| Storage Temperature (°C) | -40° to 85° |



ALL NEW

