




A brand of

**MATRIX**  
LIGHTING

POLAR CURVE:

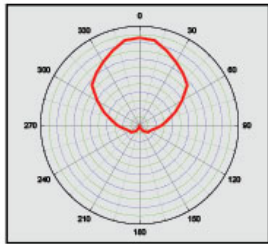

# T8 LED Tubes

The unique design of VIRIBRIGHT™ T8 LED Tubes is setting the benchmark for price and performance. It is offered in both safety switched and single side powered versions which are compatible to the majority of fixtures in the market.

## General Specifications


	Standard Version		Ultra Bright Version	
	SSP*	SW*	SSP*	SW*
Size Availability:	1.5m (5ft.) / 1.2m (4ft.) / 0.9m (3ft.) / 0.6m (2ft.)			
Color Temperature (K):	2800		4000	6000
Lumen (lm):	1.5m / 5'	1,450 (1,750)	1,700 (2,000)	1,750 (2,200)
Std (Ultra Bright)	1.2m / 4'	1,200 (1,500)	1,400 (1,800)	1,400 (2,000)
	0.9m / 3'	900 (1,100)	1,000 (1,350)	1,000 (1,500)
	0.6m / 2'	600 (750)	700 (900)	700 (1000)

Wattage	25W (1.5M / 5') / 20W (1.2M / 4') 15W (0.9M / 3') / 10W (0.6M / 2')
Voltage	85-285V AC / 220-240V AC
Base Type	G13
Working Frequency (Hz)	50-60
CRI	>80
Operating Temperature (°C)	-20° to 45°
Storage Temperature (°C)	-40° to 85°
Power Factor	0.8
Beam Angle (°)	140°
Lifespan	Up to 25,000 hrs.
Certification	CE / UL

Single Side Powered



Safety Switched

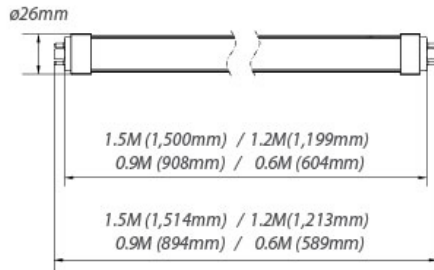

\* SSP = Single Side Powered

\* SW = Safety Switched

